

CITIPOINT



April 2016

 **EURO6**



ISUZU



CITIPOINT






TECHNICAL SPECIFICATIONS		CITIPOINT
Dimensions (mm)		
Maximum Length		12030
Maximum Width		2550
Maximum Height		3136 (Including A/C unit)
Wheelbase		5850
Front Overhang		2700
Rear Overhang		3480
Front Track Width		2152
Rear Track Width		1872
Weights (kg)		
Gross Vehicle Weight		17900
Kerb Weight		10850 kg (Fueled up + driver)
Front Axle Capacity		6300
Rear Axle Capacity		11600
Engine		
Model		Cummins ISB6.7E6 280B (Euro VI)
Type		Diesel EGR Turbocharged
Number of Cylinders		6
Displacement (cm ³)		1116,7 (x6)
Maximum Power (PS / rev/min)		204 / 2100
Maximum Torque (Nm / rev/min)		1082 / 1200 - 1400
Transmission		
Model		ZF 6 AP 1200B (A/T)
Number of Gears, Type		6 Forward, 1 Reverse, Overdrive 3 Levels With Manual and Foot Controlled Retarder Function
Final Gear Ratio		5,74
Suspensions		
Front		Independent Air Suspension - 2 Air Bellows (ECAS)
Rear		Air Suspension - 4 Air Bellows (ECAS)
Brake System		
Front / Rear		Disc / Disc
Description		Full Air Brake System With EBS (Automatic Oil, Water Separator System Opt)
Parking Brake		Air Actuated, Acted On Rear Axle
Auxiliary Brake		Intarder
Passenger Capacity (Max.)		103 passengers
Standard		27 (24 Fixed + 3 Folding) Passenger Seats + 1 (Maximum 79 Standing Passengers When Folding Seats Are Closed)
Optional		31 (28 Fixed + 3 Folding) Passenger Seats + 1 (Maximum 72 Standing Passengers When Folding Seats Are Closed)
Fuel Tank		
Fuel Tank Capacity (lt)		300
Fuel Tank Cap Lock		Fixed Fuel Tank Cap (S); Flapped Cap (Opt)
Diesel Exhaust Emission Fluid Tank (lt)		48
Generator		2x 90A - Bosch
Nominal voltage		24V
Battery		24V - 2 x 240 Ah
Steering System		Hydraulic
Gradeability (at GVW)		%23,20
Tyres		275/70 R22,5
Minimum Turning Radius (mm)		9110



EQUIPMENTS	
General	
Digital Tachograph	S
Multiplex System	S
Heating and Ventilation	
Pre-heater	Opt (Eberspacher 24 kW)
Heater (Front/Middle/Rear)	S
Air Conditioner	
Digital Air Conditioner	S (39 kW)
A/C with Heater	Opt (Heating Capacity 44 kW)
Safety & Driving Comfort	
Roof Emergency Hatch & Ventilation Hatch	S (2 units with electrical control)
Parking Sensor	S
Reverse Gear Warning Beeper	S
Interior Camera	S (DVR recording device)
Exterior Camera	S (At the Rear and On Side Rear View Mirrors)
Retarder	S (Intarder on A/T)
ABS	S (EBS)
ASR	S (EBS)
Engine Room Fire Detector and Warning System	S
Auto Fire Extinguisher for Engine Room	Opt
Automatic Engine Oil Refilling System	Opt
Diesel Exhaust Emission Fluid Heater	S
Speed Limitor	S
Skid Plate	S
Exterior	
Electrically Controlled Side View Mirrors	S
Heated Side View Mirrors	S
Daytime Running Lamps (DRL)	S
Front and Rear Fog Lamps	S
Towing Device	S (Front / Rear)
Metallic Paint	Opt
Doors	
Number of Service Doors	3 Doors
Type of Service Doors	Double Wings, Pneumatic, Inward Swing
Disabled Passenger Access	Ramp for Middle Door & Kneeling System
Remote Control for Front Door	S
Windows	
Windscreen	Single Piece Laminated
Driver's Window	With Resistance Heater, Electrical Control

Blind	Electrical Control For Windscreen Roller Blind; Manual Control For Driver Window Roller Blind
Passenger Windows	Single Piece, Non-sliding
Single Glazing	S
Hinged window	1/4 Hinged Passenger Windows
Interior	
Driver Seat	
Steering	Adjustable Steering Wheel Integrated With The Display Cluster
Driver's Seat	Air actuated, Adjustable, With Headrest
Driver's Cabin	S
Driver Overhead Cabinet	S (Locker)
Ticket Box Pre-arrangement	Opt
Passenger Compartment	
Seat Material	Cloth Pad On Plastic
Interior Lining (Ceiling)	Formica
Sidewall Lining	FRP
Interior Lining (Floor)	PVC
Interior Lighting (Ceiling)	S
Interior Luggage Space	S
Audio & Visual	
Stop Sign (Interior)	S
Info Panel for Passengers	Front (S), Rear (Opt)
Digital Destination Indicators	Rounding LED-type Headsign (Front and Side) (S), Rear Indicator Panel (S), Colored Headsign (Not Rounding) (Opt)
High Driving Mode	S
Announcement System	S (Interior / Exterior)
LCD Screen	S (1 Unit, Front); Opt (2 Units, Middle)
Digital Clock	S
DVD Player	S
Water Boiler & Coolbox	Opt
Ticket Box Brackets	O
Interior Luggage Space	S
Reverse Gear Warning Beeper	S

S: Standard
Opt: Optional

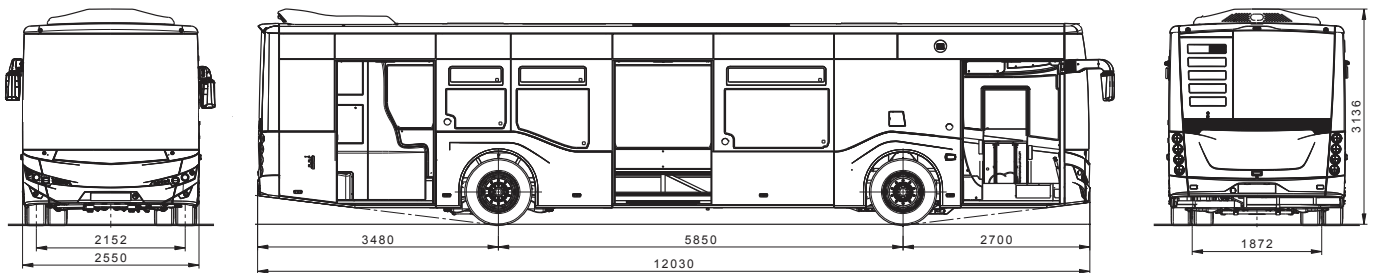

Taking into account the actual needs of the major metropolises and municipalities, Anadolu Isuzu's new 12 meter public transportation bus has been designed in a way to meet the concept of the "ideal solution for public transportation". Citiport has an attractive exterior view thanks to its outstanding and unique design. The bus offers a comfortable and safe journey to the passengers with its spacious internal layout.

Citiport is equipped with ZF 6-speed full-automatic transmission and 6 cylinder common rail turbo diesel Cummins engine, which produces 283 horsepower at 2100. Citiport's passenger capacity can be up to 103 people. The wheelchair ramp and the kneeling system make the get on and off process easy for passengers with disabilities.