

ISUZU CITIPOINT 12 CNG HP



ANADOLU ISUZU

ISUZU BUS

ISUZU CITIPORT 12 CNG HP

TECHNICAL SPECIFICATIONS

Dimensions (mm)	
Maximum Length	12030
Maximum Width	2500
Maximum Height	3400 (inc. CNG tanks)
Wheelbase	5850
Front Overhang	2700
Rear Overhang	3480

Weights (kg)	
Gross Vehicle Weight	18700

Engine	
Model	Cummins L9NE6E320
Type	CNG Turbocharged
Number of Cylinders	6
Displacement (cc)	8880
Maximum Power (kw(PS)/rpm)	235 (320) / 2000
Maximum Torque (Nm/rpm)	1357 / 1300-1400
Emission Standard	Euro VI OBD-E

Transmission	
Model	ZF 6 AP 1400 EMF, Automatic
Number of Gears	6 Forward, 1 Reverse

Steering System	
	Hydraulic

Tyres	
Tyre Sizes	275/70 R22,5


Suspension	
Front	Air Suspension - 2 Bellows Independent Suspension Electronically Controlled (ECAS)
Rear	Air Suspension - 4 Bellows Electronically Controlled (ECAS)
Anti Roll Bar	S
Kneeling System (ECAS & ELC)	S

Brake System	
Front / Rear System	Disc / Disc Full Air Brake System With EBS (Automatic Oil, Water Separator System is Optional)
Parking Brake	Air Actuated Acted on Rear Axle
Auxiliary Brake	Retarder

Fuel Tank	
Gas Tanks Capacity (L)	5 x 320 lt (1600 lt) - Type 3 CNG (NGV1&NGV2)
Gas Filling Port	Compatible with NGV2

Electrical System	
Battery	24V (2 x 240 Ah)

Passenger Capacity*	
Maximum Passenger Capacity	92
Standard Layout	27 Seated (3 Foldable Seats) + 65 Standing
Optional Seat Layouts	24 Seated + 1 Wheelchair + 64 Standing

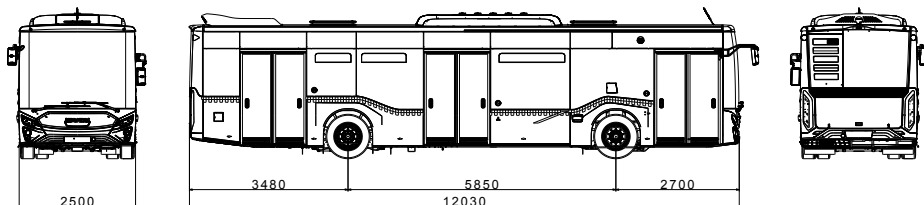

* Different seating variations are available.

EQUIPMENTS

Heating and Ventilation	
Fan Heater (Front/Middle/Rear)	S
Air Conditioner	
Digital Air Conditioner	S
A/C With Heater	Opt
A/C Dashboard Nozzle for Driver	S
Safety & Driving Comfort	
Speed Limitor	S
Tachograph	S
ASR	S
EBS	S
EBD	S
Bus Stop Brake (BSB)	S
Hillholder	S
Retarder	S
Parking Sensor	S
Spare Wheel	S
Tyre Inflation Set	S
Roof Hatch for Ventilation & Emergency Exit	S (1 Units with Electrical Control)
Reverse Gear Warning Beeper	S
Fire Extinguisher	S
Engine Compartment Fire Detection and Automatic Fire Supression System	S
Fog Lamps	S (Front / Rear)
Day Time Running Lamps (DRL)	S
Locking System	S (O: Square Lock)
Battery Main Switch	S
Exterior	
Metallic Paint	Opt
Side Stripe Stickers	Opt
Towing Device	S (Front)
Doors	
Number of Service Doors	3 Doors (S), 2 Doors (Opt)
Type of Service Doors	DoubleWing Air Actuated Interior Movement for All Front, Middle and Rear Doors
Wheelchair Ramp	Side Kneeling System and Ramp
Wheelchair Ramp Sensor	S
Remote Control	S (Front Service Door)
Windows	
Type	Non-sliding, 1/4 Hinged Passenger Windows, Single Piece (S), With Slider (Opt) Single Glazed (S)
Layers of Glass	
Interior	
Driver Seat	
Windshield Blind	S
Driver Curtain	S
Driver's Seat	Air Actuated, Adjustable
Electrically Controlled Side Mirrors	S
Heated Side Mirrors	S
Driver's Cabin	S
Driver Overhead Cabinet	S
Coathanger for The Driver	S
Ticket Validator Preparation	Opt
Lamp for Driver Seat	S
Adjustable steering wheel	S
Close-Proximity Exterior Mirror	S
Passenger Compartment	
Passenger Seat Material	Cloth Ped On Plastic
Interior Luggage Space	S
Lightening & Signalization	
Interior Ceiling Lighting	S
Stop Buttons & Signboard	S
Digital Destination Display	Front, Rear (S), Colored (Opt)
Audio & Visual	
Camera Systems	S
Camera Monitor on Dashboard	S
Recording Device (DVR)	S
Radio System	Radio, USB, MP3, CD player, DVD Player
Monitor / LCD Screen (Passenger Compartment)	S
Digital Clock	S
Driver Speaker	S
Announcement System for Passenger Area	Opt
General Safety Regulation	
Alcoholmeter Preperation	S
Lane Departure Warning System	Opt
Tyre Pressure Monitoring System	S
Reverse Motion	S
Driver Drowsiness and Attention Warning (DDAW)	S
Emergency Stop System	S
Blind Spot Information System	S
Moving Off Information System	S
Cyber Security System	S
EBS	S
Intelligent Speed Assistance	S

S: Standard Opt: Optional

ISUZU BUS