

ISUZU NOVOciti



ANADOLU ISUZU

Manufactured by Anadolu Isuzu
The one and only "Isuzu Manufacturing Management (IMM)"
certified Isuzu factory in Europe.

ISUZU BUS

TECHNICAL SPECIFICATIONS

Dimensions (mm)

Maximum Length	7502
Maximum Width	2275
Maximum Height	3332 (w AC)
Wheelbase	3385
Front Overhang	1655
Rear Overhang	2462

Weights (kg)

Gross Vehicle Weight	9800
----------------------	------

Engine

Model	ISUZU 4HK1E6E
Type	Commonrail Turbo Diesel Intercooler
Number of Cylinders	4
Displacement (cc)	5193
Maximum Power (kw(PS)/rpm)	140 (190) /2600
Maximum Torque (Nm/rpm)	510 /1600-2600
Emission Standard	Euro VI OBD-E

Transmission

Model	MT: MZZ-6F (S) AMT: ISUZU NEES (Opt)
Number of Gears	6 Forward, 1 Reverse; Overdrive
Steering System	Hydraulic

Tyres

Tyre Sizes	215/75 R17,5
------------	--------------

Suspension

Front	Parabolic Steel Alloy Leaf Springs
Rear	Air Suspension
Anti Roll Bar	S
Kneeling System (ECAS & ELC)	S

Brake System

Front / Rear System	Disc / Disc Full Air Brake System With Automatic Adjuster Dual Circuit and ABS Vacuum Assisted Exhaust Brake
---------------------	---

Auxiliary Brake

Fuel Tank

Fuel Tank Capacity (lt)	130 lt (Spare Wheel on Bus) (S) 100 lt (Spare Wheel on Chassis) (Opt), 16,5
-------------------------	---


Adblue Tank (lt)

Electrical System

Battery	24V (2X12V) - 105 Ah
---------	----------------------

Passenger Capacity*

Maximum Passenger Capacity	54
Standard Layout	25 Seated(4 Foldable Seats) + 16 Standing
Layout with Wheelchair	21 Seated + 1 Wheelchair + 25 Standing

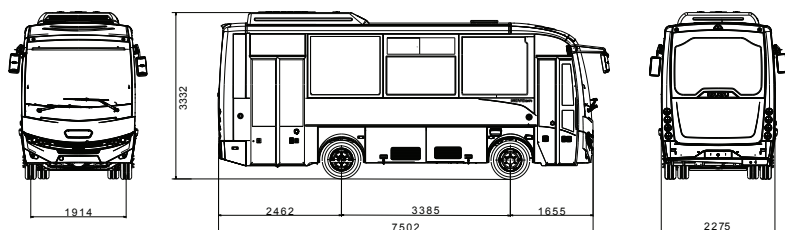

EQUIPMENTS

Heating and Ventilation

Pre Heater	Opt
Fan Heater (Front/Middle/Rear)	S

Air Conditioner

Digital Air Conditioner	S
A/C Dashboard Nozzle Diffuser for Driver	S

Safety & Driving Comfort

Speed Limitor	S
Tachograph (Smart)	S
ASR	S
EBD	S
Bus Stop Brake (BSB)	Opt
Retarder	Opt
Spare Wheel	S
Tyre Inflation Set	S
Roof Hatch for Ventilation & Emergency Exit	S
Reverse Gear Warning Beeper	S
Fire Extinguisher	Opt
Engine Compartment Fire Detection and Automatic Fire Supression System	S
Fog Lamps	Opt
Day Time Running Lamps (DRL)	S
Locking System	S
Battery Main Switch	S

Exterior

Metallic Paint	Opt
Towing Device	S (Front)
Side Stripe Sticker	Opt

Doors

Number of Service Doors	2 Doors
Type of Service Doors	Front: Double Wing, Pneumatic, Outward Swing Rear: Double Wings, Pneumatic, Outward Swing
Wheelchair / Strollers Ramp	S
Remote Control	S

Windows

Passenger Windows	One Piece, Coloured Sliding, Single Glazed (S) Double Glazed (Opt) Single Glazed (S) Sliding, Double Glazed (S) S (Manual)
Front Door Window	
Driver's Window	
Windshild Blind	

Interior

Driver Compartment

Windshield Blind	S
Driver's Seat	Air Actuated, Adjustable
Electrically Controlled Side Mirrors	Opt
Heated Side Mirrors	Opt
Coathanger for The Driver	S
Ticket Validator Preparation	Opt
Lamp for Driver Seat	S

Passenger Compartment

Passenger Seat Material	Cloth Ped On Plastic
-------------------------	----------------------

Lightening & Signalization

Interior Ceiling Lighting	S
Stop Buttons & Signboard	S
Digital Destination Display	Opt

Audio & Visual

Camera Systems	Opt
Camera Monitor on Dashboard	Opt
Recording Device (DVR)	Opt
Radio System	Opt
Digital Clock	S

General Safety Regulation

LDWS	Opt
EBS	S
Passive Lane Change	Opt
Blind Spot Information System (BSIS)	S
Moving Off Information System (MOIS)	S
Intelligent Speed Assistance (ISA)	S
Tyre Pressure Monitoring System (TPMS)	S
Alcohol Interlock Installation	S (Preperation)
Driver Drowsiness and Attention Warning (DDAW)	S
Cyber Security and Cyber Security Management System	S
Reversing Motion (RM)	S
Emergency Stop Signal	S