



ISUZU CITIPOINT 12

Manufactured by Anadolu Isuzu
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.

ISUZU CITIPORT 12

TECHNICAL SPECIFICATIONS

Dimensions (mm)

Maximum Length	12030
Maximum Width	2550
Maximum Height	3155 (w A/C)
Wheelbase	5850
Front Overhang	2700
Rear Overhang	3480

Weights (kg)

Gross Vehicle Weight	18700
----------------------	-------

Engine

Model	Cummins B6.7E6E300B
Type	Commonrail Turbo Diesel Intercooler
Number of Cylinders	6
Displacement (cc)	6700
Maximum Power (kw(PS)/rpm)	220 (300) / 2100
Maximum Torque (Nm/rpm)	1182 / 1150 - 1400
Emission Standard	Euro VI OBD-E

Transmission

Model	ZF 6AP 1200B
Number of Gears	6 Forward, 1 Reverse

Steering System

Hydraulic and Adjustable Dashboard and Steering Wheel Column in Height and Inclination

Tyres

Tyre Sizes	275/70 R22,5
------------	--------------

Suspension

Front	Independent Air Suspension - 2 Bellows Electronically Controlled (ECAS)
Rear	Air Suspension - 4 Bellows Electronically Controlled (ECAS)
Anti Roll Bar	S
Kneeling System (ECAS & ELC)	S

Brake System

Front / Rear System	Disc / Disc Full Air Brake System With EBS (Automatic Oil, Water Separator System Is Optional) Air Actuated Acted on Rear Axle
Parking Brake	Intarder (Retarder is Integrated to Transmission)

Fuel Tank


Fuel Tank Capacity (lt)	300
Adblue Tank (lt)	43

Electrical System

Battery	24V (2 x 12V) - 240 Ah
---------	------------------------

Passenger Capacity*

Maximum Passenger Capacity	107
Standard Layout	27 Seated (3 Foldable Seats) +80 Standing (3 Doors)
Layout with Wheelchair	24 Seated + 1 Wheelchair + 79 Standing (3 Doors)

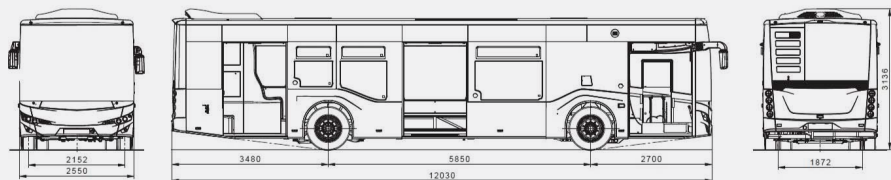

EQUIPMENTS

Heating and Ventilation

Pre Heater	Opt
Fan Heater (Front/Middle/Rear)	S

Air Conditioner

Digital Air Conditioner	S
A/C Dashboard Nozzle Diffuser for Driver	S
A/C With Heater	Opt

Safety & Driving Comfort

Tachograph	S
Multiplex System	S
ABS	S
ASR	S
EBS	S
EBD	S
Bus Stop Brake (BSB)	S
Retarder	S
Parking Sensor	S
Spare Wheel	S
Tyre Inflation Set	S
Roof Hatch for Ventilation & Emergency Exit	S (2 Units with Electrical Control)
Reverse Gear Warning Beeper	S
Fire Extinguisher	S
Engine Compartment Fire Detection and Automatic Fire Suppression System	S
Fog Lamps	S (Front / Rear)
Day Time Running Lamps (DRL)	S
Locking System	S (0: Square Lock)
Battery Main Switch	S

Exterior

Metallic Paint	Opt
Side Stripe Stickers	Opt
Towing Device	S (Front)

Doors

Number of Service Doors	3 Doors (S), 2 Doors (Opt)
Type of Service Doors	Double Wing Air Actuated Interior Movement For All Front, Middle And Rear Doors
Wheelchair Ramp	Manual with Sensor
Remote Control	S (Front Service Door)

Windows

Passenger Windows	Non-sliding, 1/4 Hinged Passenger Windows, Single Glazed (S) With slider, Double Glazed (Opt) Double Glazed (S) Electrically Controlled, Single Glazed with Heater (S) Windshield Blind (S), Driver Curtain (S)
Front Door Window	
Driver's Window	
Blind	

Interior

Driver Seat

Driver's Seat	Air Actuated, Adjustable
Electrically Controlled and Heated Side Mirrors	S
Close-Proximity Exterior Mirror	S
Driver's Cabin	Semi Glass (S), Full Glass (Opt)
Ticket Validator Preparation	Opt
USB Charger for Driver	S

Passenger Compartment

Backrest (For Standing Passengers)	S
USB Charger for Passengers	Opt

Lightening & Signalization

Interior Ceiling Lighting	S (Continuous Type With LED)
Digital Destination Display	Slither Route Display (S), Rear Route Indicator Panel (S), Colored Front Route Indicator Panel (Opt)

Audio & Visual

Camera Systems	S
Camera Monitor on Dashboard	S
Recording Device (DVR)	S
Radio System	S Radio, USB, MP3
Monitor / LCD Screen (Passenger Compartment)	S
Digital Clock	S
Driver Speaker	S
Announcement System for Passenger Area	Opt

S: Standard **Opt:** Optional