



# ISUZU NOVOciti

---

Manufactured by Anadolu Isuzu  
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.

## TECHNICAL SPECIFICATIONS

### Dimensions (mm)

Maximum Length	7502
Maximum Width	2275
Maximum Height	3332 (w AC)
Wheelbase	3385
Front Overhang	1655
Rear Overhang	2462

### Weights (kg)

Gross Vehicle Weight	9800
----------------------	------

### Engine

Model	ISUZU 4HK1E6C-E
Type	Commonrail Turbo Diesel Intercooler
Number of Cylinders	4
Displacement (cc)	5193
Maximum Power (kw(PS)/rpm)	140 (190) /2600
Maximum Torque (Nm/rpm)	510 /1600-2600
Emission Standard	Euro VI OBD-E

### Transmission

Model	MT: MZZ-6F (S) AMT: ISUZU NEES (Opt)
Number of Gears	6 Forward, 1 Reverse; Overdrive

### Steering System

Tyre Sizes	215/75 R17,5
------------	--------------

### Suspension

Front	Parabolic Steel Alloy Leaf Springs
Rear	Air Suspension
Anti Roll Bar	S
Kneeling System (ECAS & ELC)	S

### Brake System

Front / Rear	Disc / Disc
System	Full Air Brake System With Automatic Adjuster Dual Circuit and ABS Air Actuated, Operating on Rear Axle Vacuum Assisted Exhaust Brake

Parking Brake  
Auxiliary Brake

### Fuel Tank


Fuel Tank Capacity (lt)	100 lt (Spare Wheel on Chassis) (Opt), 130 lt (Spare Wheel on Bus) (S)
Adblue Tank (lt)	16,5

### Electrical System

Battery	24V (2X12V) - 105 Ah
---------	----------------------

### Passenger Capacity\*

Maximum Passenger Capacity	55
Max. Passenger Capacity Layout	17 Seated + 38 Standing
Standard Layout	21 Seated (4 Foldable Seats) +23 Standing
Layout with Wheelchair	17 Seated + 1 Wheelchair + 33 Standing

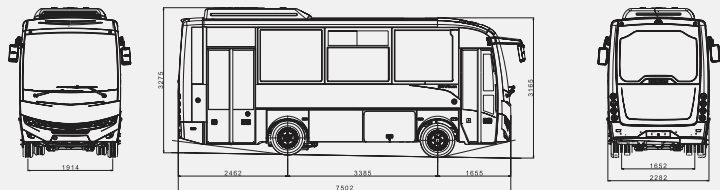

## EQUIPMENTS

### Heating and Ventilation

Pre Heater	Opt
Fan Heater (Front/Middle/Rear)	S

### Air Conditioner

Digital Air Conditioner	S
A/C Dashboard Nozzle Diffuser for Driver	S
Tropical A/C	Opt

### Safety & Driving Comfort

Speed Limitor	S
Tachograph	S
ABS	S
ASR	S
EBD	S
Bus Stop Brake (BSB)	Opt
Retarder	Opt
Parking Sensor	Opt
Spare Wheel	S
Tyre Inflation Set	S
Roof Hatch for Ventilation & Emergency Exit	S
Reverse Gear Warning Beeper	S
Fire Extinguisher	Opt
Engine Compartment Fire Detection and Automatic Fire Supression System	S
Fog Lamps	Opt
Day Time Running Lamps (DRL)	S
Locking System	S
Battery Main Switch	S

### Exterior

Metallic Paint	Opt
Towing Device	S (Front)

### Doors

Number of Service Doors	2 Doors
Type of Service Doors	Front: Single Wing, Pneumatic, Inward Swing Rear: Double Wings, Pneumatic, Outward Swing
Wheelchair / Strollers Ramp	S
Remote Control	S

### Windows

Passenger Windows	One Piece, Coloured Sliding, Single Glazed (S) Double Glazed (Opt) Single Glazed (S)
Front Door Window	Sliding, Double Glazed (S)
Driver's Window	S (Manuel)
Windshild Blind	

### Interior

Driver Seat	
Windshield Blind	S
Driver's Seat	Air Actuated, Adjustable
Electrically Controlled Side Mirrors	Opt
Heated Side Mirrors	Opt
Coathanger for The Driver	S
Ticket Validator Preparation	Opt
Lamp for Driver Seat	S

### Passenger Compartment

Passenger Seat Material	Cloth Ped On Plastic
USB Charger for Passangers	Opt

### Lightening & Signalization

Interior Ceiling Lighting	S
Stop Buttons & Signboard	S
Digital Destination Display	Opt

### Audio & Visual

Camera Systems	Opt
Camera Monitor on Dashboard	Opt
Recording Device (DVR)	Opt
Radio System	Opt
Digital Clock	S
Driver Speaker	S
Announcement System for Passenger Area	Opt

S: Standard Opt: Optional

\* Different seating variations are available.