



ISUZU NQR 90

Manufactured by Anadolu Isuzu
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.

TECHNICAL SPECIFICATIONS

NQR 90 4400

NQR 90 5000

DIMENSIONS (mm)

A - Wheelbase	4475	5000
B - Maximum Length	7953	8478
C - Front Overhang	1128	1128
D - Rear Overhang	2350	2350
E - Front Axle Body Start Point Distance	725	725
F - Usable Frame Length	6100	6625
G - Body Width	2040	2040
H - Maximum Height	2275	2275
K - Maximum Width	2129	2129
L - Rear Track Width	1650	1650
M - Front Track Width	1746	1746
N - Chassis Height	850	850
Chassis Width	850	850

WEIGHTS (kg)

Gross Vehicle Weight, GVW	9000	9000
Curb Weight*	3300/3335	3340/3375
Pay Load Capacity	5700/5665	5660/5625
Front Axle Capacity	3400	3400
Rear Axle Capacity	6600	6600

ENGINE

Model	4HK1 - Euro VI (OBD-C)	4HK1 - Euro VI (OBD-C)
Maximum Power	190 PS (140 kW) @ 2,600 rpm	190 PS (140 kW) @ 2,600 rpm
Maximum Torque	510 Nm @ 1,600 rpm	510 Nm @ 1,600 rpm
Cylinders, Displacement	4 cylinders, 5193 cc	4 cylinders, 5193 cc
Type	Commonrail Turbo Diesel Intercooler	

TRANSMISSION

Model	ISUZU MZZ6F	ISUZU MZZ6F
Type, Number of Gears	Manual / Semi-automatic, 6 forward - 1 reverse	Manual / Semi-automatic, 6 forward - 1 reverse
Final Gear Ratio	4,777	4,777

PERFORMANCE

Maximum Speed (km/h)	99	99
Gradeability (%)	37	37
Turning Radius (mm)	8735	8905

SUSPENSIONS

Front Suspension	Mechanical suspension with leaf spring
Rear Suspension	Mechanical suspension with leaf spring

BRAKE SYSTEM

Front / Rear	Disc Brakes
Brake System	Full air brake, Double Circuit, Automatic brake adjuster ABS, ESC, ASR and EBL (Electronic Brake Levelling) LDWS and AEBS Exhaust Brake Effective at rear brakes

Auxiliary Brake
Park Brake

ELECTRICAL SYSTEM

Battery	2x12V - 90Ah
Generator	24V 80A (1.92kW)
Starter	24V - 4,5kW



OTHER

Front/Rear Tyres	225/75R17,5	225/75R17,5
Passenger Capacity	2 passengers + 1 driver	
Clutch	Hydraulic Assisted, Ø325	
Fuel Tank (lt)	100	100
AdBlue Tank (lt)	16,5	16,5

*Curb weight include driver (75 kg), all liquids full, fuel tank 90% full. Weights may change based on options.

EQUIPMENTS

ABS, ASR, ESC	S
LDWS - Lane Departure Warning System	S
Trip Computer	S
Front/Rear Fog Lights	S
Day Light	S
Power Windows	S
Electric Head Light Levelling	S
Immobilizer	S
Hydraulic Steering	S
Steering Lock	S
AM/FM CD Radio Player	-
Adjustable Driver Seat	S
Towing hook (Front)	S
EGR - Exhaust Gas Recirculation	S
Dry Type Air Filter	S
Remote Control Central Lock	S
Locking Fuel Cap	S
Seat Belts - 3 Units	S
Ceiling Shelf	S
Seat Back Tray	S
PTO Preparation - Transmission Slide	-
Digital Tacograph	S
Air Conditioning	S
ADR Package	-
TS EN 1501-1:2011 Garbage Truck Preparation	-

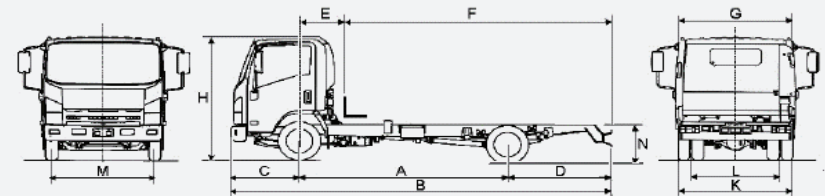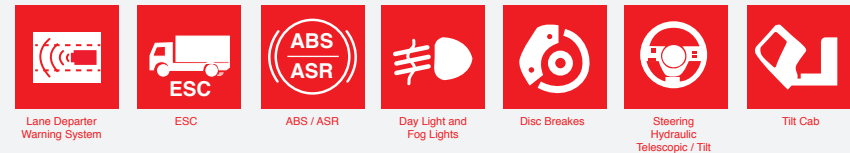

Anadolu Isuzu Otomotiv Sanayi ve Ticaret A.Ş. reserves the right to make changes in the specifications and the design of the products without prior notice. Some data may refer nominal values.

S: Standard Opt: Optional